

# KeHong Enterprises Co.,Ltd.

No7118,Floor 7, Sha feng business building, Jin sha zhou, Baiyun District, Guangzhou, China.

Website: [www.khenterprise.en.alibaba.com](http://www.khenterprise.en.alibaba.com)

Mail: [lily@gzhelectric.com](mailto:lily@gzhelectric.com)

Tel:+86-20-82586869, Mobile: +861591877767

## Moulded Parts

### CBO-4 Cores Breakout

Low Voltage 4 Cores Cable Breakout


#### Features/Applications

Made from radiation cross-linked polyolefin, and suitable to applications up to 1KV. The properties of electrical insulation, UV resistant and water proof make it widely used in electric power industry to provide insulation and seal over the crutch of multi-core cables.

Minimum shrink temperature:110°C

Minimum fully recovery temperature:130°C

Standard color: Black

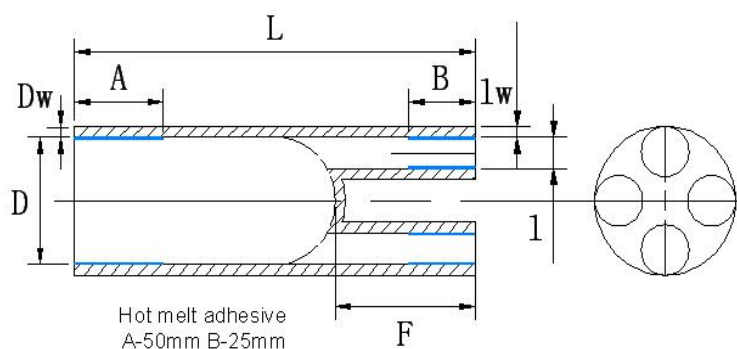

#### Technical Data

Property	Test Method	Typical Data
Operation temperature	IEC216	-55°C TO +110°C
Tensile strength	ASTMD2671	13Mpa(min.)
Tensile strength after thermal aging(120°C/168hrs.)	ASTMD2671	10Mpa(min.)
Elongation at break	ASTMD2671	300% (min.)
Elongation at break after thermal aging (120°C/168hrs.)	ASTMD2671	250% (min.)
Dielectric strength	IEC243	15kv/mm(min.)
Volume resistance	IEC93	10 <sup>13</sup> Ω . cm
Water absorption	ISO62	1% (max.)

#### Products Dimensions

Order Ref. No.	Base Diameter (mm)		Finger Diameter (mm)		Recovered length ± 10%(mm)		Recovered wall ± 10%	
	As Supplied (min.)	After Recovered (max.)	As Supplied (min.)	After Recovered (max.)	Full Length	Finger Length	Base (mm)	Finger (mm)
CBO-40/15	40	15	14	3.5	105	26	2.2	2.0
CBO -55/21	55	21	20	5.0	150	40	3.1	2.6
CBO -65/26	65	26	26	7.0	175	45	3.3	2.9
CBO -75/26	75	26	28	7.0	175	45	3.3	2.9

## KeHong Enterprises Co.,Ltd.

No7118,Floor 7, Sha feng business building, Jin sha zhou, Baiyun District, Guangzhou, China.

Website: [www.khenterprise.en.alibaba.com](http://www.khenterprise.en.alibaba.com)

Mail: [lily@gzhelectric.com](mailto:lily@gzhelectric.com)

Tel:+86-20-82586869, Mobile: +861591877767

CBO -82/37	82	37	30	9.0	190	60	4.0	3.0
CBO -90/37	90	37	32	9.0	190	60	4.0	3.0
CBO-100/47	100	47	38	12.0	198	58	4.0	3.0
CBO-125/52	125	52	52	15.0	240	75	4.0	4.0
CBO-160/70	160	70	64	19.0	260	75	4.0	4.0